

## Product Range: LED Round Panel

### Key Features

- TRIAC Dimming/ON-OFF function
- Weled Power driver and Boke driver for high quality

### Construction Features


- Extra thin aluminum frame
- Housing material: Aluminum + PS
- Recessed installation

### Technical Features

- Input Voltage:  
AC200-240V 50/60HZ
- Operation Voltage: DC36-42V
- Total harmonic distortion: THD<15%
- Power Factor: PF>0,9
- Color Index: Ra>80
- Lumen maintenance @6000h: >80%
- Switching cycle before failure: 100,000
- IP Rating: IP20
- Life Span: 50,000 hours
- Warranty: 5 years
- Operation Temperature: -15°C~+50°C
- Storage Temperature: -25°C~+55°C




### Dimension

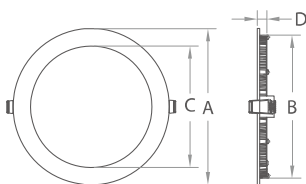

Product Name	A	B	C	D
R90	Ø90	Ø64	Ø50	12
R120	Ø120	Ø105	Ø82	12
R145	Ø145	Ø134	Ø102	12
R17	Ø170	Ø156	Ø127	12
R190	Ø190	Ø185	Ø153	12
R240	Ø240	Ø225	Ø193	12
R300	Ø295	Ø280	Ø250	12

Unit:mm

### Product Structure

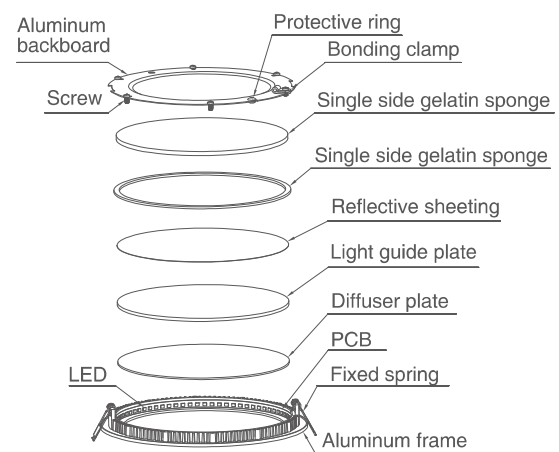

### Application

- Retail, offices, schools, hospitals
- Corridors and stairwells
- Suspended ceiling lighting for offices

